




CERTIFIED **COMBINED**
PROTECTION AND
MAXIMISED
STORAGE FOR YOUR
PROFESSIONAL
LOCATION



DUOGUARD GII

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade II.
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is made from solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

DUOGUARD GII

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-65	578	526	547	452	400	360	65	265	1
M-115	716	626	587	590	500	386	114	379	2
M-150	901	626	587	775	500	386	150	456	2
M-205	1176	626	587	1050	500	386	203	582	2
M-290	1626	626	587	1500	500	386	290	748	3
M-355	1626	701	611	1500	575	410	354	829	3
M-445	1876	701	641	1750	575	440	443	970	3

Projection of hinge*(20mm) and projection of handle** (65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 15mm

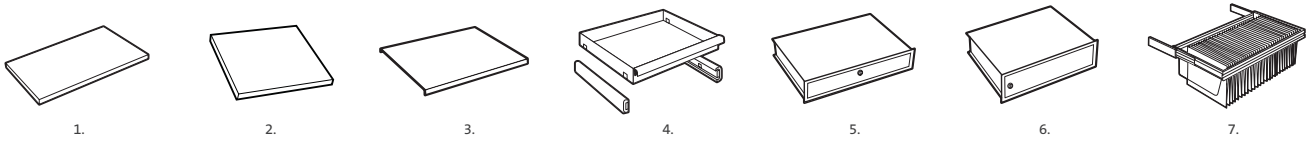

OPTIONAL INTERNAL FITTINGS

1. Shelf* (M-65) 2. Heavy duty shelf**
*Max shelf capacity 60kg **Max shelf capacity 120kg

AVAILABLE FROM M-115 & ABOVE

- 3. Shelf (prepared for hanging files)
- 4. Extendable shelf 5. Extendable drawer
- 6. Lockable compartment 7. Suspension file frame

LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A). Dual locking is available from model 115 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are independently tested and are certified in accordance with the EN 1300 standard. DuoGuard's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:

- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means the safe will protect paper documents for 90 minutes. This certification was awarded by SP Technical Research Institute of Sweden.

STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 90 minutes to simulate the effects of a severe fire.

STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

BURGLARY TESTING

DuoGuard GII has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grade II. A range of attack tools were used to test DuoGuard GII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.

Authorised dealer

www.chubbsafes.com