




CERTIFIED **COMBINED**  
**PROTECTION** AND  
MAXIMISED  
STORAGE FOR YOUR  
**PROFESSIONAL**  
**LOCATION**



# DUOGUARD GII

## BURGLARY & FIRE-RESISTANT PROTECTION




### KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade II.
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002.
- The three-way boltwork is made from solid steel bolts.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.
- Data media insert certified, 60 Diskette by NT Fire 017, for one hour's fire protection.

# DUOGUARD GII

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width (mm)	External depth (mm)	Internal height (mm)	Internal width (mm)	Internal depth (mm)	Volume (litres)	Weight (kg)
65	578	526	547	452	400	360	65	265
110	716	626	587	590	500	386	114	379
150	901	626	587	775	500	386	150	456
200	1176	626	587	1050	500	386	203	582
300	1626	626	587	1500	500	386	290	748
350	1626	701	611	1500	575	410	354	829
450	1876	701	641	1750	575	440	443	970

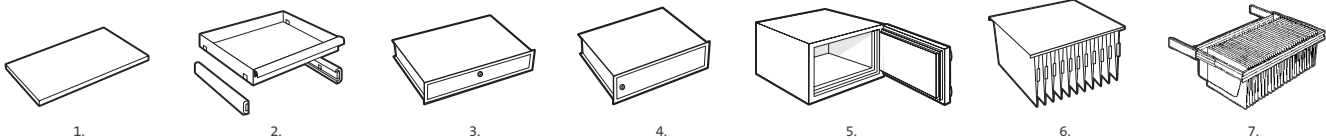

### INTERNAL FITTINGS

1. Shelf
2. Extendable shelf
3. Extensible drawer
4. Lockable drawer
5. Data media insert
6. Shelf for hanging files (size 110 and above)
7. Suspension file frame

### LOCK OPTIONS

As the primary locking option, DuoGuard GII safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A). Dual locking is available from model 110 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard. DuoGuard GII's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if lock is being opened under duress.

### FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means the safe will protect paper documents for 90 minutes. This certification was awarded by SP Technical Research Institute of Sweden.

#### STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 90 minutes to simulate the effects of a severe fire.

#### STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

### BURGLARY TESTING

DuoGuard GII has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grade II. A range of attack tools were used to test DuoGuard GII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)