



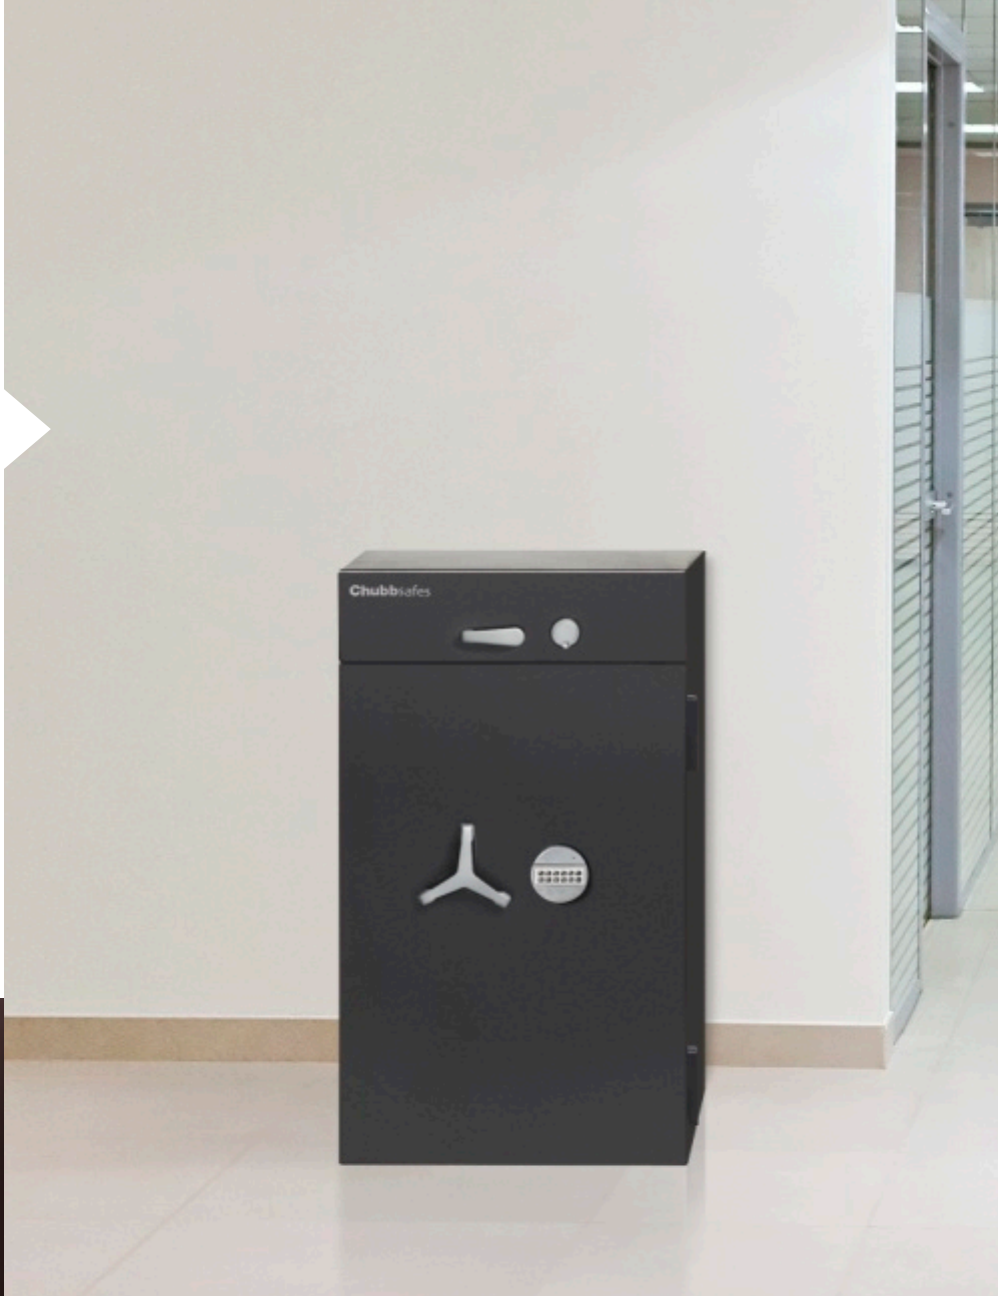

CONVENIENT DEPOSIT
FOR VARIOUS
OPERATIONS ON
BUSINESS PREMISES

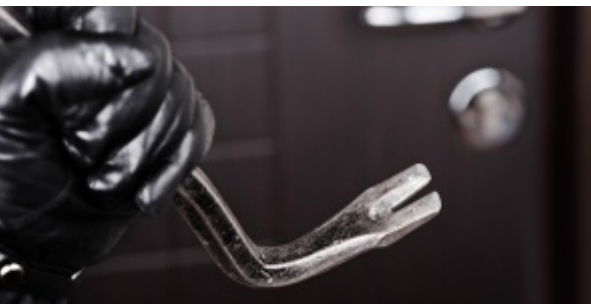

PROGUARD DT

BURGLARY-RESISTANT PROTECTION




KEY FEATURES

- Certified, tested and approved in accordance with the European EN 1143-2 standard, in Grades DI and DII.
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function.
- Built using the same technology as the ProGuard, which is certified in accordance with the European EN 1143-1 standard for Grade II.
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs to a minimum.
- Solid steel three-way boltwork.
- Anti-fishing device to prevent anyone reaching the contents through the drawer.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts.
- A Class A mechanical key lock or a Class B electronic lock, approved in accordance with EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access.
- Drawer trap fitted with a Class A key lock.

PROGUARD DT

PRODUCT SPECIFICATIONS

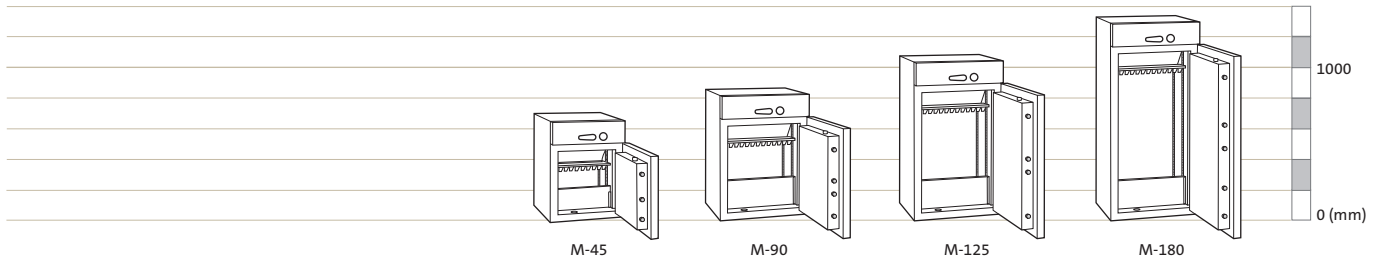

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Net Weight (kg) Gr I	Net Weight (kg) Gr II	Capacity* (litres)	Drawer Width (mm)	Drawer Depth (mm)
M-45	687	500	521	314	400	360	162	302	45	350	230
M-90	847	600	561	474	500	386	218	426	91	450	230
M-125	1052	600	561	659	500	386	242	499	127	450	230
M-180	1307	600	561	934	500	386	290	602	180	450	230

* Useable volume below deposit and anti-fishing device.

Drawers internal dimensions (mm)

Height	Width M-45	Width M-90–M-180	Depth
90	350	450	230

LOCK OPTIONS

The drawer trap is locked with a Class A key lock. The safe can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

The primary lock on the safe can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are independently tested and are certified in accordance with the EN 1300 standard. ProGuard DT's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:



- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

Authorised dealer

BURGLARY TESTING



ProGuard DT has been EN 1143-2 certified in Grades DI and DII by ECB-S¹. This fully graded burglary protection means that insurance ratings for the safe are not affected by the drawer trap function.

A range of attack tools were used to test ProGuard DT's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

1. European Certification Board Security Systems

GUNNEBO MALAYSIA SDN BHD
Suite 13A.01, Level 13A,
Menara Summit,
Persiaran Kewajipan USJ 1,
47600 Subang Jaya,
Selangor Darul Ehsan
Tel: 03-8024 3050
Fax: 03-8024 3051
Website: www.gunnebo.com.my
Email: info.my@gunnebo.com

www.chubbsafes.com.my