





**CERTIFIED COMBINED
PROTECTION** FOR HIGH-
END RESIDENTIAL
USERS, THE RETAIL AND
THE BANKING SECTOR

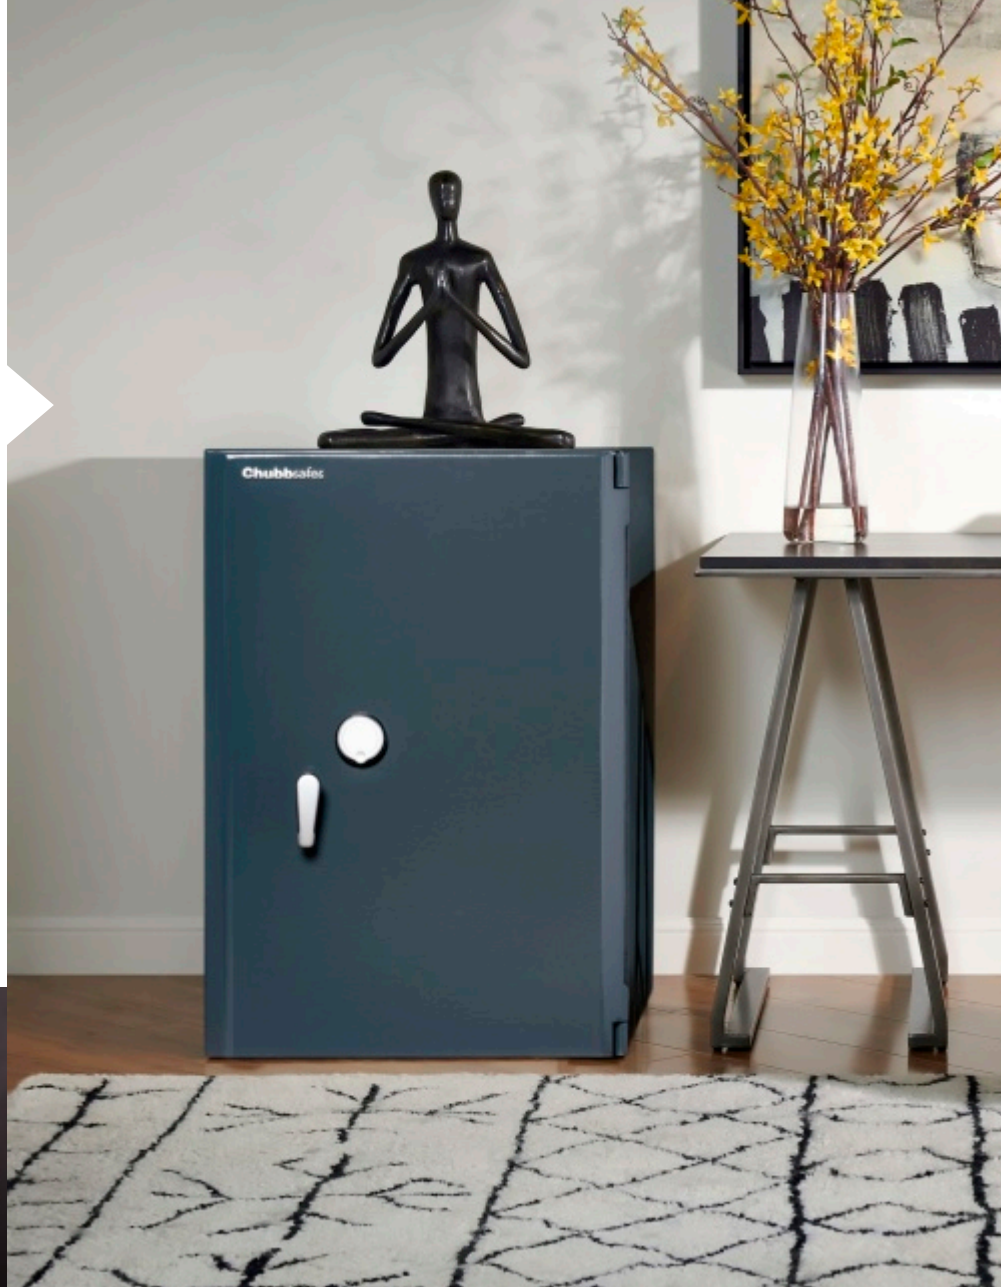

DUOFORCE

CERTIFIED GRADE III BURGLARY- AND
60 MINUTES FIRE-RESISTANCE




KEY FEATURES

- Burglary resistance in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade III. Meets the demands of all Insurance Companies when it comes to burglary resistance.
- Tested by an independent, ISO 17025 accredited laboratory according to the NT Fire 017 – 60 Paper standard with certification managed by ECB•S. Protects your vital documents from the affects of fire.
- All sizes can be trusted to protect their contents not just against unauthorised forced burglary attack but also against the extreme temperatures experienced during fire
- Supplied with one key lock as standard with the option of a factory fitted electronic lock or optional two locks. This gives the flexibility to customise how DuoForce can be secured and operated.
- DuoForce Grade III introduces a new small size, Model 40; ideally suited to Residential clients requiring the safe storage of jewelry and valuables or needing to comply with local legislation concerning gun storage. DuoForce can be installed almost anywhere.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity

DUOFORCE

PRODUCT SPECIFICATIONS

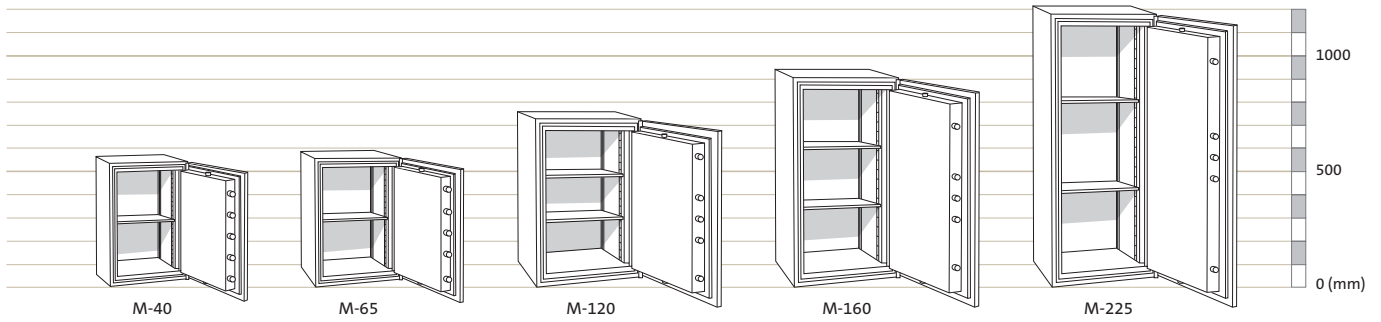

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-40	537	451	525	412	326	327	43	200	1
M-65	565	537	582	440	412	384	69	260	1
M-120	725	635	617	600	510	419	127	380	2
M-160	910	635	617	785	510	419	167	465	2
M-225	1185	635	617	1060	510	419	226	600	2

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



OPTIONAL INTERNAL FITTINGS

1. Shelf* (M-65) 2. Heavy duty shelf**
*Max shelf capacity 60kg **Max shelf capacity 120kg

LOCK OPTIONS

Supplied with one key lock as standard with the option of a factory fitted electronic lock. To facilitate varying customer requirements, the DuoForce Grade 3 door is prepared to accept a second lock and within certifications, a number of alternative electronic locks can be fitted. The standard locks fitted are Mauer Variator B key lock (Model 70076 with key length of 164mm) and/or the Tecnosicurezza Pulse 10 electronic lock. All locks are independently tested and are certified in accordance with the EN 1300 standard. DuoForce's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:

- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

FIRE TESTING

DuoForce Grade III has been approved in accordance with standard NT Fire 017 – 60 Paper which means the safe will protect paper documents for 60 minutes. The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire. During furnace testing the temperature within the DuoForce safes tested did not exceed 170 degrees Centigrade, the temperature at which paper will char.

BURGLARY TESTING

The DuoForce has been approved by ECB+S in accordance with the European EN 1143-1 standard for burglary protection in Grade III. A range of attack tools were used to test the DuoForce's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.

www.chubbsafes.com