



**PROVEN DUAL
PROTECTION** FOR YOUR
CASH, DOCUMENTS
AND VITAL RECORDS
**IN THE HOME OR AT
THE OFFICE**



RHINO MK II

BURGLARY & FIRE-RESISTANT SAFE




KEY FEATURES

- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable.
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Rhino Mk II has been tested in accordance with EN 15659, and is certified to level LFS 60 P by ECB•S giving 1 hour fire protection.

RHINO MK II

PRODUCT SPECIFICATIONS

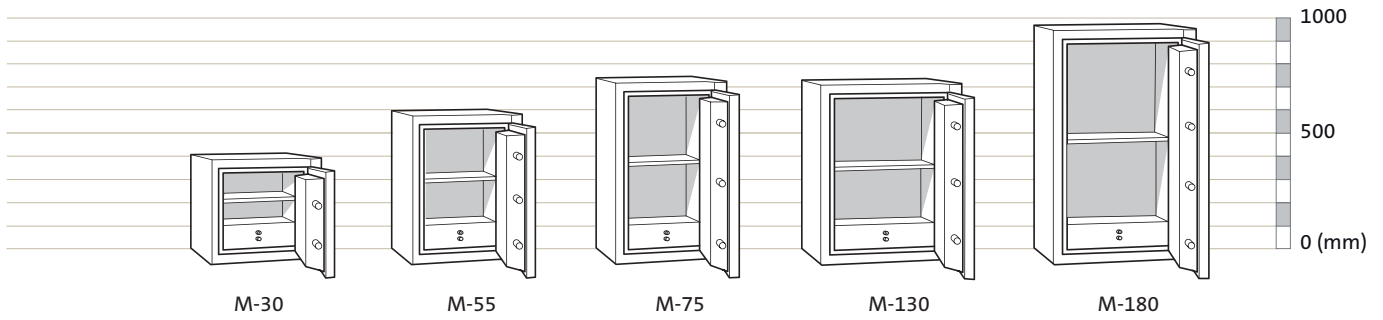

Model	External Height (mm)	External width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Volume (litres)	Net Weight** (kg)
M-30	400	500	502	270	370	325	32	158
M-55	600	500	502	470	370	325	57	213
M-75	750	500	502	620	370	325	75	255
M-130	750	630	602	620	500	425	132	341
M-180	980	630	602	850	500	425	181	421

* Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%

LOCK OPTIONS

As the standard locking option, all models of Rhino Mk II are fitted with a key lock and a combination lock.

KEY LOCK

Secured by eight-lever double-bitted, non-key retaining key lock.

COMBINATION LOCK


Listed under UL Group 2, VdS class 2, CEN B, A2P B. Gain enhanced control via the Sargent & Greenleaf certified three-wheel combination lock.

ELECTRONIC LOCK

A variety of high security certified electronic locks can be fitted on request.

5 MODEL OPTIONS

Whether for home or office use, Rhino Mk II offers a range of options to customise your safe to meet your security needs. Choose from five practical models, ranging from 400 to 980mm in height and from 32- to 181-litre capacity. All models include a shelf as a standard fitting and a full width drawer for greater convenience.

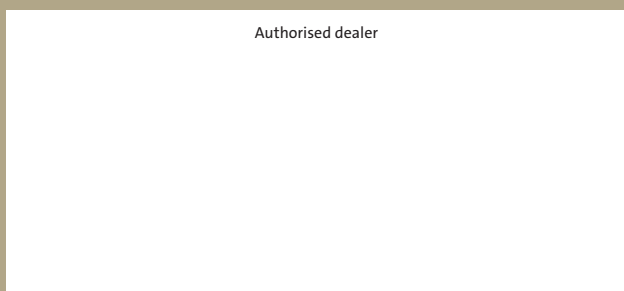

TESTING



BURGLARY

Certified by ECB•S in accordance with the European standard, EN 14450, for burglary protection in S2.



FIRE

Independently tested and certified by ECB•S according to European Standard EN 15659 as providing document fire resistance for up to 60 minutes.

www.chubbsafes.com