

KEEP YOUR **DEPOSITS**
SAFE IN THE RETAIL AND
COMMERCIAL PREMISES



RHINO MK II DT

BURGLARY & FIRE-RESISTANT PROTECTION




KEY FEATURES

- Designed for retail and commercial use.
- 65mm barrier thickness made of a high-density monolithic casting contained within inner and outer steel casings.
- Solid composite 35mm thick main door is combined with additional protection plates to protect crucial locking areas. Solid steel 28.5 mm diameter moving bolts attach the door to the body, while fixed "anti-heeling" bolts on the door's rear edge protect the hinge side.
- Deposit drawer with solid 10mm steel plate front combined with an internal anti-fishing mechanism to secure all items deposited.
- Main door secured by EN 1300 Class A primary locks which can be single lock, be it a key lock, manual combination or electronic lock depending upon individual requirements. For additional security, a second lock is possible.
- Drawer deposit unit secured by a single EN 1300-certified Class A lock.
- Two security fixing bolts to ensure it can be firmly fixed to the floor when installed.

RHINO MK II DT

PRODUCT SPECIFICATIONS

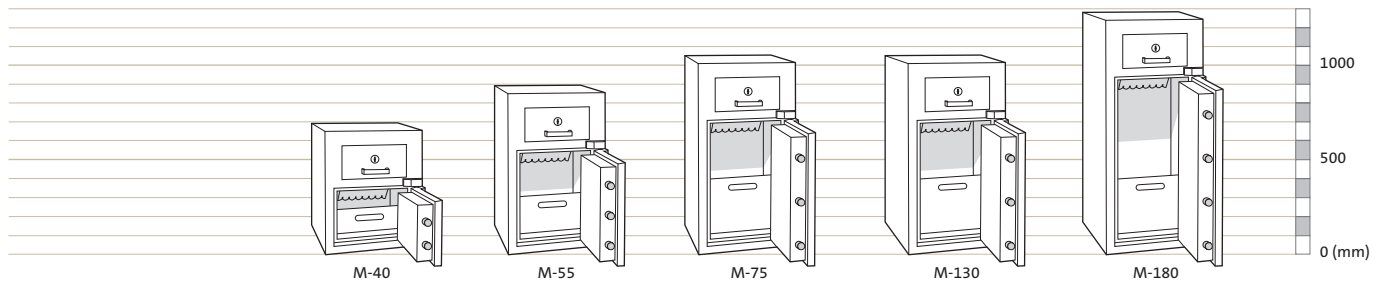

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	Moving Front Bolts	Fixed Back Bolts
M-40	654	500	501	270	370	320	40	256	2	2
M-55	854	500	501	470	370	320	56	330	3	3
M-75	1004	500	501	620	370	320	73	353	3	3
M-130	1004	630	601	620	500	420	130	453	3	3
M-180	1234	630	601	850	500	420	179	533	4	4

Dimensions exclude handle and hinge projections.

MAXIMUM SIZE OF DEPOSIT PACKAGE

Deposit drawer capable of accepting items measuring up to 40mm high x 240mm wide x 110mm deep.

Small envelopes, cassettes and bags can all be accommodated, but to avoid entanglement with the anti-fishing device, bags should be clean and in good condition and should not have any tears, rips or security seals.

Authorised dealer

www.chubbsafes.com